


LEVER BLOCK

LEVER BLOCK HSH-616

FEATURES and ADVANTAGES

- Automatic Double Pawl Braking System
- Asbestos Free Friction Disc
- Industrial Powder Coating meet RoHS requirement
- One Step Operation for free wheel
- 1500 Cycles lift test, Meet JBT7334, EN13157, ANSI B30.16, AS1418 Standards

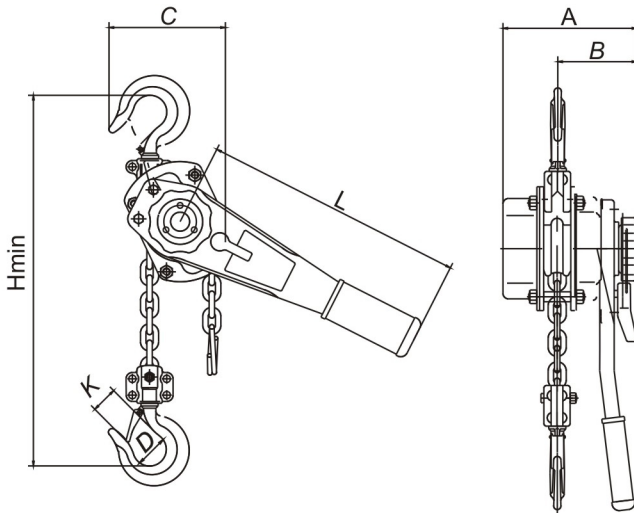

Model		HSH616-0.75	HSH616-1.5	HSH616-3	HSH616-6	HSH616-9
Capacity	tons	0.75	1.5	3.0	6.0	9.0
Standard lift	m	1.5	1.5	1.5	1.5	1.5
Running test load	KN	11.2	22.5	45	75	112.5
Effort required to lift rated load	N	140	220	320	340	360
Strands of load chain		1	1	1	2	3
Diameter of load chain	mm	6	8	10	10	10
Dimensions (mm)	A	145	175	195	195	195
	B	86	100	115	115	115
	C	134	150	190	242	307
	D	38	48	50	65	81
	H	340	380	490	620	700
	L	285	410	410	410	410
	K	27	36	38	48	54
Net weight	kg	9.5	11.5	18.5	27.5	46
Packing measurement	cm	37.5X16X18	52X17X22	55X18.5X22.5	57X21X23	60X42X28
Extra weight per metre of Extra lift	kg	0.8	1.4	2.2	4.4	6.6