

Product: **PEARL single lever sink mixer DN 10**

Ref.: **RAK17050**

Product description

solid lever
single hole mounted
flow class A
aerator M 22x1
ceramic cartridge with hot water safety device Ø35 mm
swivel U spout
flexible high pressure supply tubes 3/8 inch
rapid installation set
in accordance to ..EN 817

Finishes:
05 chrome plated

Product picture




Advertisement


- * KLUDI RAK LLC item no. RAK17050
- ** chrome plated brass, in accord. to EN 50930-6
- *** in accordance to EN 817
- **** ceramic cartridge with hot water safety device Ø 35 mm

single lever sink mixer, manufacturer KLUDI RAK LLC item no. RAK17050, DN 10, chrome plated brass, type: single lever sink mixer, solid lever, with swivel U spout, with aerator M 22x1, noise level DIN EN 4109 group I, report no. P-IX., flow class A, ceramic cartridge with hot water safety device Ø 35 mm, flexible high pressure supply tubes 3/8 inch with DVGW / KIWA / WRAS approv. with metal body length 350 mm, lever projection 84 mm, nozzle projection 160 mm, overall height 310 mm, nozzle height 222 / 310 mm, for borehole diameter min. 32 mm, rapid installation set, for pressure type water heater, continuous line heater, PN 10.

Dimensional drawing

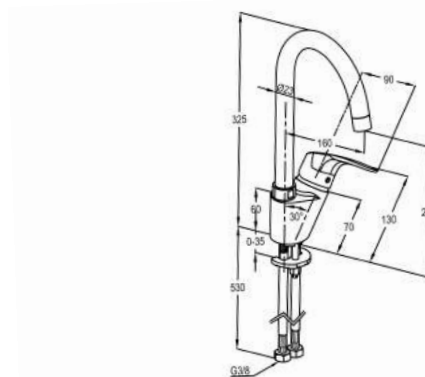

Flow rate diagram

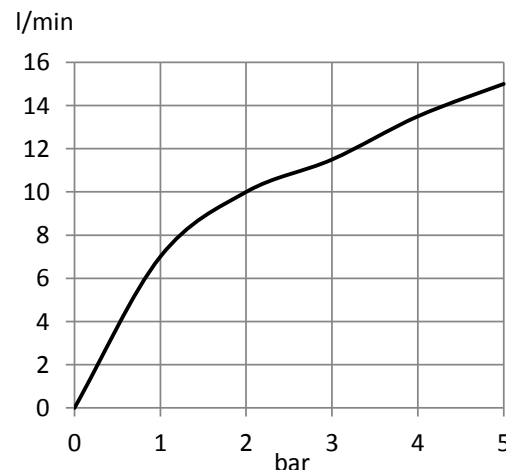

Product: PEARL single lever sink mixer DN 15

Ref.: RAK17050-01

Product description

solid lever
single hole mounted
flow rate 6.0 ltr/min.
aerator M 22x1
ceramic cartridge with hot water safety device Ø35 mm
swivel U spout
flexible high pressure supply tubes 1/2 inch
rapid installation set
in accordance to ..EN 817
Pressure Compensating Aerator 6.0 ltr/min.

Finishes:
05 chrome plated

Product picture




Advertisement

- * KLUDI RAK LLC item no. RAK17050-01
- ** chrome plated brass, in accord. to EN 50930-6
- *** in accordance to EN 817
- **** ceramic cartridge with hot water safety device Ø 35 mm

single lever sink mixer, manufacturer KLUDI RAK LLC item no. RAK17050-01, DN 15, chrome plated brass, type: single lever sink mixer, solid lever, with swivel U spout, with aerator M 22x1, noise level DIN EN 4109 group I, report no. P-IX., flow rate 6.0ltr/min., ceramic cartridge with hot water safety device Ø 35 mm, flexible high pressure supply tubes 1/2 inch with DVGW / KIWA / WRAS approv. with metal body length 350 mm, lever projection 84 mm, nozzle projection 160 mm, overall height 310 mm, nozzle height 222 / 310 mm, for borehole diameter min. 32 mm, rapid installation set, for pressure type water heater, continuous line heater, PN 10.

Dimensional drawing

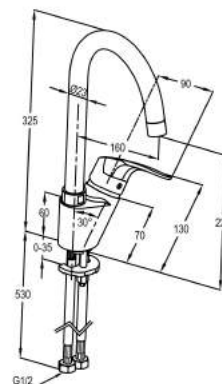

Flow rate diagram

