


MMQ-Stücke mit TYTON®-Muffen

PN 10/16, Doppelmuffenbogen 90° nach DIN EN 545 Serie A bzw. Werksnorm

Double socket elbow 90° / 1/4 with TYTON®-sockets, PN 10/16,
according to DIN EN 545 series A or factory standard

DN	Maße in mm dimensions in mm		kg/Stück kg/piece
	Lu	e	
80	100	7,0	8,0
100	125	7,2	11,6
125	150	7,5	16,2
150	175	7,8	20,6
200	225	8,4	31,7
250	280	9,0	39,6
300	330	9,6	64,0
350	381	10,2	102,0
400	430	10,8	114,0
500	600	12,0	235,0
600	638	13,2	337,1
700	720	14,4	480,0
800	800	15,6	650,0

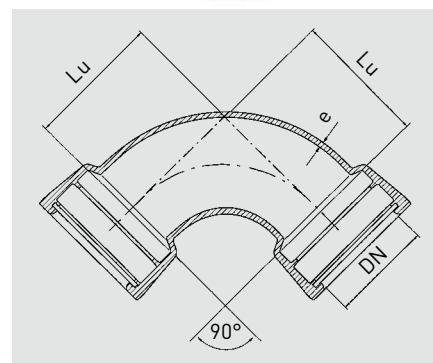

MQ-Stücke 90° mit TYTON®-Muffe

PN 10/16, FGR 70

Socket elbow 90° / 1/4 with TYTON®-socket, PN 10/16, FGR 70

DN	Maße in mm dimensions in mm				kg/Stück kg/piece
	Lu1	Lu2	b	e	
80	100	312	232	7,0	8,6
100	123	333	233	7,2	11,5
125	149	374	249	7,5	18,4
150	176	419	269	7,8	22,4
200	226	491	291	8,4	43,8
250	280	583	400	9,0	76,1
300	330	660	400	9,6	83,2

