


Q-Stücke

PN 10/16, Flanschbogen 90° nach DIN EN 545 Serie A

Double flanged elbow 90° / 1/4, PN 10/16, according to DIN EN 545 series A

DN	Maße in mm dimensions in mm		kg/Stück kg/piece
	L	e	
40	140	7,0	6,4
50	150	7,0	7,6
65	165	7,0	11,0
80	165	7,0	9,0
100	180	7,2	12,1
125	200	7,5	18,0
150	220	7,8	23,6
200	260	8,4	34,9
250	350	9,0	56,3
300	400	9,6	79,5
350	450	10,2	102,5
400	500	10,8	129,0
500	600	12,0	184,0
600	700	13,2	436,8
700	800	14,4	539,0
800	900	15,6	774,0
900	1000	16,8	582,7
1000	1100	18,0	998,0

Achtung! Bohrbilder größer DN 150 ändern sich bei Druckstufe PN 16!
Attention! At pressure stage PN 16 drilling changes for pieces bigger than DN 150!

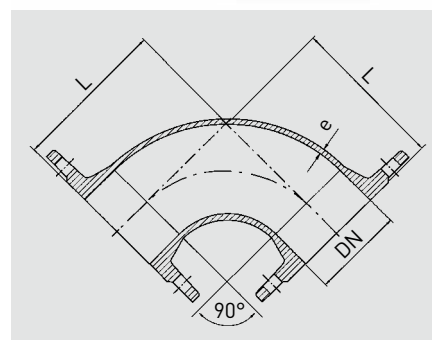

FRISCHHUT-Gussbearbeitung: Moderne CNC-Bohrwerke und CNC-Bearbeitungszentren stehen sowohl für einzelne Teile als auch für Serienbearbeitung zur Verfügung.

FRISCHHUT - cast iron machining: Modern CNC drills and CNC machining centres are available, both for individual parts and for machining series.